






DISCUS

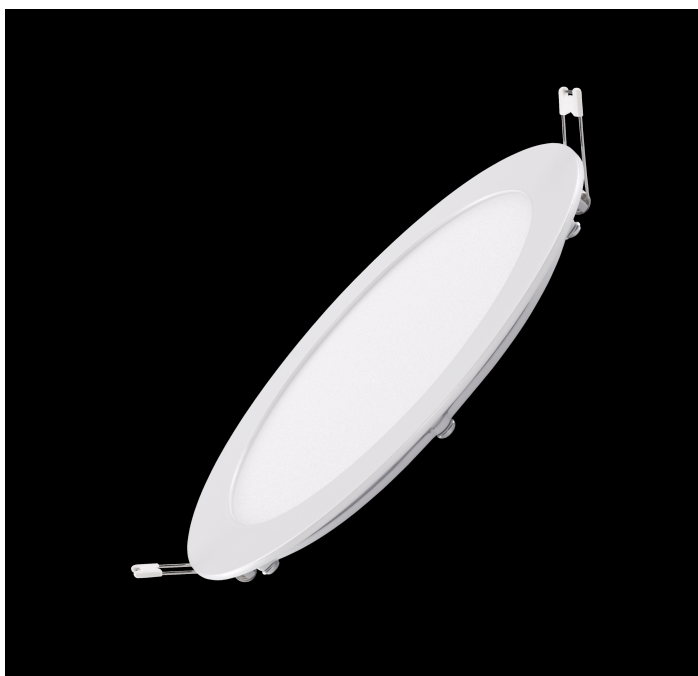

Up to 101 lm/W
L80 B10 50.000h

Instructions of use and Declaration of conformity:
<https://elmromania.ro/produse/office/discus/>

Standard:



| | D | h |
|-------------|-----|----|
| DISCUS D150 | 145 | 17 |
| DISCUS D180 | 190 | 17 |

| TYPE | optic | CRI | CCT | Flux (lm) | Total Power (W) | Efficacy lm/W | TA | WEIGHT kg |
|-----------------------------|-------|-----|------|-----------|-----------------|---------------|---------------|-----------|
| DISCUS D150 900/830 | OP | 80 | 3000 | 900 | 9 | 100 | +10°C / +40°C | 0.2 |
| DISCUS D150 ML 475-850/830 | OP | 80 | 3000 | 475-850 | 4-8.5 | 99 | +10°C / +40°C | 0.2 |
| DISCUS D150 950/840 | OP | 80 | 4000 | 950 | 9 | 101 | +10°C / +40°C | 0.2 |
| DISCUS D150 ML 500-875/840 | OP | 80 | 4000 | 500-875 | 4-8.5 | 100 | +10°C / +40°C | 0.2 |
| DISCUS D180 1325/830 | OP | 80 | 3000 | 1325 | 13.7 | 97 | +10°C / +40°C | 0.3 |
| DISCUS D180 ML 875-1525/830 | OP | 80 | 3000 | 875-1525 | 9-16 | 98 | +10°C / +40°C | 0.3 |
| DISCUS D180 1375/840 | OP | 80 | 4000 | 1375 | 13.7 | 100 | +10°C / +40°C | 0.3 |
| DISCUS D180 ML 925-1575/840 | OP | 80 | 4000 | 925-1575 | 9-16 | 98 | +10°C / +40°C | 0.3 |