


MOSEL - L







Up to 155lm/W
L80 B10 70.000h

Instructions of use and Declaration of conformity:
<https://elmromania.ro/produse/human-centric-lighting/mosel/>

Standard:



Options:

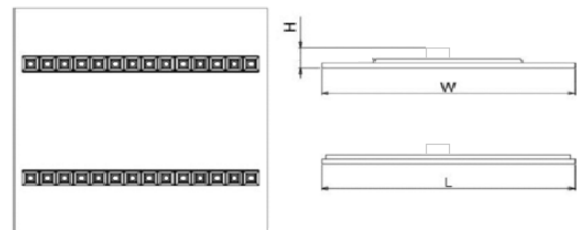

	L	W	H
MOSEL-L 2L M600X600	596	596	23
MOSEL-L 1L M1200X300	1196	296	23

TYPE	optic	CRI	CCT	Flux (lm)	Total Power (W)	Efficacy lm/W	UGR	TA	WEIGHT kg	unit / cart	unit /palet
MOSEL-L 2L M600X600 3200/830	LEDIL	80	3000	3200	22	145	<19	+10°C / +40°C	3.5	1	50
MOSEL-L 2L M600X600 3400/840	LEDIL	80	4000	3400	22	155	<19	+10°C / +40°C	3.5	1	50
MOSEL-L 1L M1200X300 3200/830	LEDIL	80	3000	3200	22	145	<19	+10°C / +40°C	3.5	1	50
MOSEL-L 1L M1200X300 3400/840	LEDIL	80	4000	3400	22	155	<19	+10°C / +40°C	3.5	1	50