


# NAPOLI.P




**Up to 143 lm/W**  
**L80 B10 70.000h**

Instructions of use and Declaration of conformity:  
<https://elmromania.ro/produse/office/napoli-p/>


## Standard:

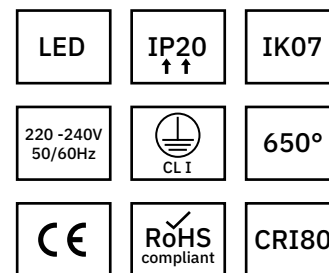

## Options:



HCL

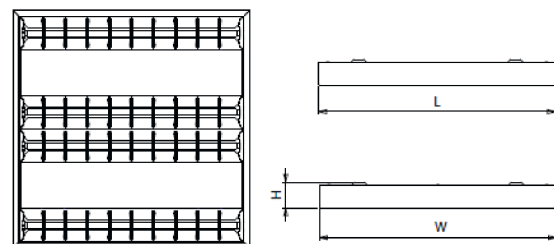

	L	W	H
NAPOLI.PLED M600X600	604	604	58
NAPOLI.PLED M1200X130	1215	130	57
NAPOLI.PLED M1200X300	1204	304	58
NAPOLI.PLED M1500X130	1515	130	57
NAPOLI.PLED M1500X300	1504	304	58

# NAPOLI.P

TYPE	optic	CRI	CCT	Flux (lm)	Total Power (W)	Efficacy lm/W	UGR	TA	WEIGHT kg	unit / cart	unit /palet
NAPOLI.P LED M600X600 2 3880/830 DPB	DPB	80	3000	3880	31.5	123	<19	+10°C / +40°C	4.7	1	50
NAPOLI.P LED M600X600 2 4070/840 DPB	DPB	80	4000	4070	31.5	129	<19	+10°C / +40°C	4.7	1	50
NAPOLI.P LED M600X600 3 3010/830 DPB	DPB	80	3000	3010	23.0	131	<19	+10°C / +40°C	4.7	1	60
NAPOLI.P LED M600X600 3 3160/840 DPB	DPB	80	4000	3160	23.0	137	<19	+10°C / +40°C	4.7	1	60
NAPOLI.P LED M600X600 4 4200/830 DPB	DPB	80	3000	4200	31.7	132	<19	+10°C / +40°C	4.7	1	60
NAPOLI.P LED M600X600 4 4400/840 DPB	DPB	80	4000	4400	31.7	139	<19	+10°C / +40°C	4.7	1	60
NAPOLI.P LED M1200X300 2 4080/830 DPB	DPB	80	3000	4080	30.0	136	<19	+10°C / +40°C	4.7	1	50
NAPOLI.P LED M1200X300 2 4290/840 DPB	DPB	80	4000	4290	30.0	143	<19	+10°C / +40°C	4.7	1	50
NAPOLI.P LED M1500X300 2 6740/830 DPB	DPB	80	3000	6740	50.0	135	<19	+10°C / +40°C	5.5	1	50
NAPOLI.P LED M1500X300 2 7070/840 DPB	DPB	80	4000	7070	50.0	141	<19	+10°C / +40°C	5.5	1	50