


# NOVA L







Up to 155 lm/W  
L80 B10 70.000h

Instructions of use and Declaration of conformity:  
<https://elmromania.ro/produse/human-centric-lighting/nova/>

## Standard:



## Options:

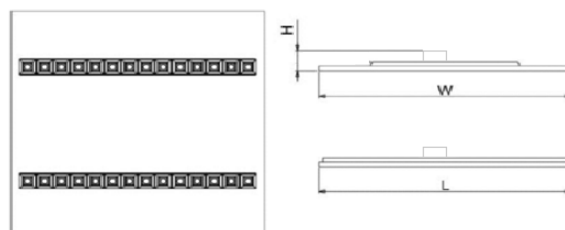

	L	W	H
NOVA 2L M600X600	596	596	57
NOVA 2L M625X625	621	621	57
NOVA 2L M675X675	671	671	57
NOVA 1L M1200X300	1196	296	33

TYPE	optic	CRI	CCT	Flux (lm)	Total Power (W)	Efficacy lm/W	UGR	TA	WEIGHT kg	unit / cart	unit /palet
NOVA-L 2L M600X600 3200/830	LEDIL	80	3000	3200	22.0	145	<19	+10°C / +40°C	3.5	1	50
NOVA-L 2L M600X600 3400/840	LEDIL	80	4000	3400	22.0	155	<19	+10°C / +40°C	3.5	1	50
NOVA-L 1L M1200X300 3200/830	LEDIL	80	3000	3200	22.0	145	<19	+10°C / +40°C	3.5	1	50
NOVA-L 1L M1200X300 3400/840	LEDIL	80	4000	3400	22.0	155	<19	+10°C / +40°C	3.5	1	50