


RAPSODY.P






Up to 122 lm/W
L80 B10 70.000h

Instructions of use and Declaration of conformity:
<https://elmromania.ro/produse/office/rapsody-p-cri80/>

Standard:



Options:

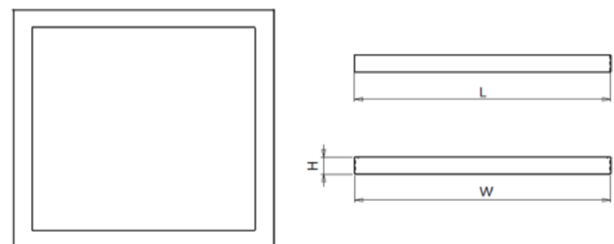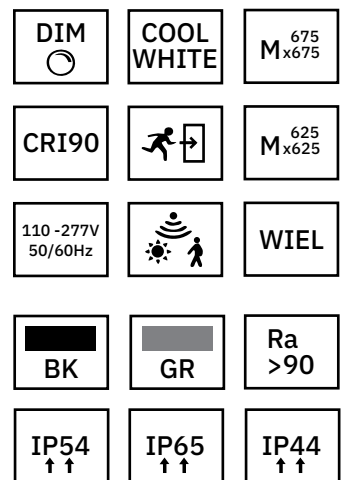

	L	W	H
RAPSODY.P V2 M6X6	620	620	48.5
RAPSODY.P V2 M12x3	1220	320	48.5

RAPSODY.P

TYPE	optic	CRI	CCT	Flux (lm)	Power (W)	lm/W	UGR	TA	kg	cart	/palet
RAPSODY.P V2 M6x6 3620/840	MP	80	4000	3620	30	122	<19	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 3440/830	MP	80	3000	3440	30	116	<19	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 3500/840	OP	80	4000	3500	30	118	>20	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 3350/830	OP	80	3000	3350	30	113	>20	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 3860/840	MP	80	4000	3860	32.3	120	<19	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 3700/830	MP	80	3000	3700	32.3	115	<19	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 3900/840	OP	80	4000	3900	32.3	121	>20	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 3700/830	OP	80	3000	3700	32.3	115	>20	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 5220/840	MP	80	4000	5220	46.0	113	>20	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 5000/830	MP	80	3000	5000	46.0	109	>20	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 5200/840	OP	80	4000	5200	46.0	113	>20	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M6x6 5000/830	OP	80	3000	5000	46.0	109	>20	+10°C / +40°C	7.5	1	50
RAPSODY.P V2 M12X3 3400/840	MP	80	4000	3400	30.0	113	<19	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 3200/830	MP	80	3000	3200	30.0	107	<19	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 3400/840	OP	80	4000	3400	30.0	113	>20	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 3200/830	OP	80	3000	3200	30.0	107	>20	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 3800/840	MP	80	4000	3800	33.0	115	<19	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 3600/830	MP	80	3000	3600	33.0	109	<19	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 3800/840	OP	80	4000	3800	33.0	115	>20	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 3600/830	OP	80	3000	3600	33.0	109	>20	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 5200/840	MP	80	4000	5200	47.0	111	>20	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 5000/830	MP	80	3000	5000	47.0	106	>20	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 5200/840	OP	80	4000	5200	47.0	111	>20	+10°C / +40°C	8.0	1	50
RAPSODY.P V2 M12X3 5000/830	OP	80	3000	5000	47.0	106	>20	+10°C / +40°C	8.0	1	50